

## 3042 PHOSPHATE ANALYZER

**Waltron's 3042 Phosphate Analyzer is the first choice for online analysis of dissolved phosphate in ultrapure water applications.**



The 3042 is trusted worldwide to deliver accurate and reliable readings with minimal maintenance and low total cost of ownership. Common application points in a boiler system include make-up water, condensate, boiler feed-water, saturated steam/main steam, and cooling water.

### FEATURES

- Accurate and wide-range analysis
- Multi-stream available
- Fast loop reservoir
- Adjustable cycle and calibration frequency
- Automatic calibration and validation (QA/QC)
- Compact design
- Color touchscreen display
- Grab sample capability
- Internal datalogger
- Low reagent level alarm
- Automatic start/stop based on sample flow detection
- Minimal analyzer maintenance
- Panel mounting bracket available for Hach 5000 replacement



### Wet Section

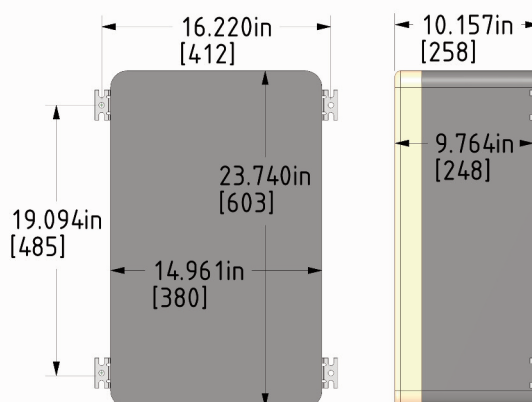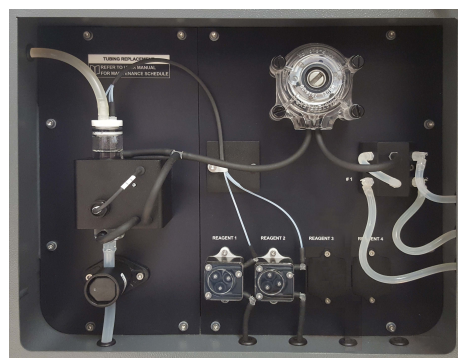

See reverse side for specifications.

## 3042 PHOSPHATE ANALYZER | GENERAL SPECIFICATIONS

### PERFORMANCE

<b>Range</b>	0-5ppm, 0-20ppm; 0-150ppm (internal dilution), 0-300ppm (external dilution)
<b>Accuracy</b>	+/- 2% of full scale
<b>Reproducibility</b>	+/- 2% of reading
<b>Analysis Time</b>	9 min, batch process
<b>Sampling Frequency (Cycle Time)</b>	One reading every 15 mins, adjustable
<b>Required Maintenance</b>	Once a month replenish reagents, Quarterly replace tubing
<b>Reagent Consumption (approximate)</b>	1 or 2 reagents (depending on range), 2L each per month
<b>Sensor Classification</b>	Colorimetric with glass flowcell and LED source
<b>Application</b>	Boiler water and cooling water
<b>Ambient Temperature Range</b>	10-45°C analyzer (50-113°F)
<b>Atmospheric Pressure Range</b>	No Limits
<b>Humidity</b>	Up to 90% not condensable
<b>Unit Dimensions</b>	Height=23.6"(60 cm), Width=15"(38 cm), Depth=8.3"(21 cm)
<b>Positioning and Installation Details</b>	Wall mounting, bench supported, or panel mounting (optional)
<b>Weight</b>	17 kg (37.5 lbs.)
<b>Degree of Protection</b>	IP55 (NEMA 4): Wet section, IP65 (NEMA 4x): Electronics
<b>Alarms</b>	2 or 4 configurable alarm relays
<b>Power Supply</b>	110-220Vac, 50-60 Hz 80 VA
<b>Certification (on request)</b>	Meets low voltage and low electromagnetic compatibility directives

### SAMPLE DELIVERY OPERATING CONDITIONS

<b>Temperature Range</b>	5-55°C (41-131°F)
<b>Inlet Sample</b>	100-500 ml/min, atmospheric, flexible tubing O.D. 1/4" (6 mm)
<b>Outlet Sample</b>	Atmospheric, waste tubing O.D. 3/8" (9 mm)
<b>PH</b>	3-12
<b>Sample Conditioning Requirements</b>	Filtering between 10 and 60 micron, depending on the matrix, needed only to avoid clogging.
<b>Materials in Contact with Sample</b>	Glass, Silicone, Plexiglass, Stainless Steel AISI 316

### SIGNAL OUTPUTS

<b>Analog Outputs</b>	4-20mA (galvanic isolator module available as option) or 0-5V
<b>Serial I/O Options</b>	RS232; RS485; MODBUS; PROFIBUS

### OPERATIONAL CALIBRATION

<b>Single/Multi Point</b>	Multi-Point: zero and mid range
<b>Matrix Corrections</b>	Yes, sample blank correction
<b>Manual/Automatic</b>	Both

102-030-B.1



#### WALTRON GROUP HEADQUARTERS

25 Minneakoning Road, Suite 101

Flemington, NJ 08822 USA

Phone: +1 908 534 5100

Fax: +1 908 534 5546

[www.waltron.net](http://www.waltron.net)