

## 3049 ETHYLENE/PROPYLENE GLYCOL ANALYZER

**Waltron's 3049 Analyzer is the most advanced instrumentation for online measurement of ethylene glycol and propylene glycol.**



The 3049 stands alone as capable of delivering accurate and precise automatic measurement of ethylene glycol and propylene glycol in water.

### FEATURES

- Accurate and wide-range analysis
- Multi-stream available
- Fast loop reservoir
- Adjustable cycle and calibration frequency
- Automatic calibration and validation (QA/QC)
- Compact design
- Color touchscreen display
- Grab sample capability
- Internal datalogger
- Low reagent level alarm
- Automatic start/stop based on sample flow detection
- Minimal analyzer maintenance



### Wet Section

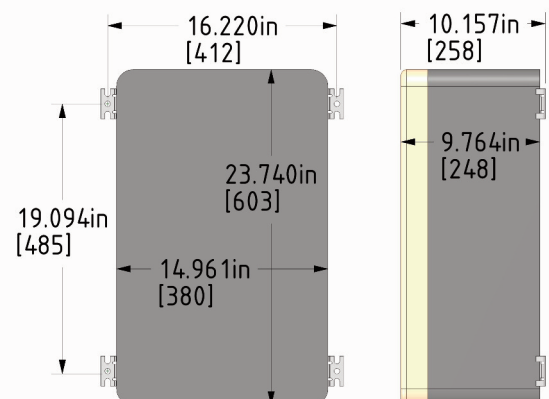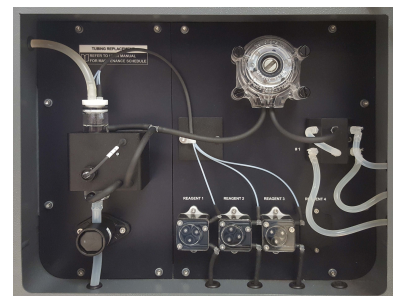

See reverse side for specifications.

## 3049 ETHYLENE/PROPYLENE GLYCOL ANALYZER | GENERAL SPECIFICATIONS

### PERFORMANCE

<b>Sensor Classification</b>	Colorimetric with glass flowcell and LED source
<b>Application</b>	Demineralized, boiler, potable, surface and waste water
<b>Power Supply</b>	110-220Vac, 50-60 Hz 80 VA
<b>Humidity</b>	Up to 90% not condensable
<b>Ambient Temperature Range</b>	10-45°C analyzer (50-113°F)
<b>Range</b>	0-15 ppm, 0-150 ppm (internal dilution)
<b>Accuracy</b>	+/- 5% of full scale
<b>Analysis Time</b>	15 min, batch process
<b>Sample Frequency (Cycle Time)</b>	One reading every 20 min, adjustable
<b>Positioning and Installation Details</b>	Wall mounting, bench supported, or panel mounting (optional)
<b>Alarms</b>	2 or 4 configurable alarm relays
<b>Degree of Protection</b>	IP55 (NEMA 4): Wet section, IP65 (NEMA 4x): Electronics
<b>Reagent Consumption (approx.)</b>	4 reagents: Reagent 1 - 2L per month; Reagent 2 - 4L per month; Reagent 3 - 1L per month; Reagent 4 - 4L per month
<b>Materials in Contact with Sample</b>	Glass, Silicone, Plexiglass, Stainless Steel AISI 316
<b>CE Certification (on request)</b>	Meets low voltage and low electromagnetic compatibility directives
<b>Sample Conditioning Requirements</b>	Filtering between 10 and 60 micron, depending on the matrix, needed only to avoid clogging
<b>Weight</b>	17 kg (37.5 lbs.)

### SAMPLE DELIVERY OPERATING CONDITIONS

<b>Temperature Range</b>	5-55°C (41-131°F)
<b>Inlet Sample</b>	100-500 ml/min, atmospheric, flexible tubing O.D. 1/4"(6 mm)
<b>Outlet Sample</b>	Atmospheric, waste tubing O.D. 3/8"(9 mm)
<b>PH</b>	3-12

### SIGNAL OUTPUTS

<b>Analog Outputs</b>	4-20mA (galvanic isolator module available as option) or 0-5V
<b>Serial I/O Options</b>	RS232; RS485; MODBUS; PROFIBUS

### OPERATIONAL CALIBRATION

<b>Frequency/Intervals</b>	Recommended: daily
<b>Single/Multi-Point</b>	Multi-Point: zero and mid-range
<b>Matrix Corrections</b>	Yes, sample blank correction
<b>Manual/Automatic</b>	Both

102-033-C.1



#### WALTRON GROUP HEADQUARTERS

25 Minneakoning Road, Suite 101

Flemington, NJ 08822 USA

Phone: +1 908 534 5100

Fax: +1 908 534 5546

[www.waltron.net](http://www.waltron.net)